



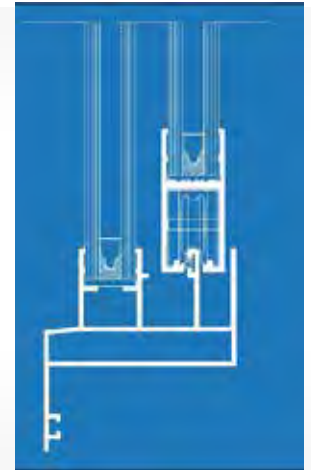

ALU COLD Windows

ALU Slide D25 - D26

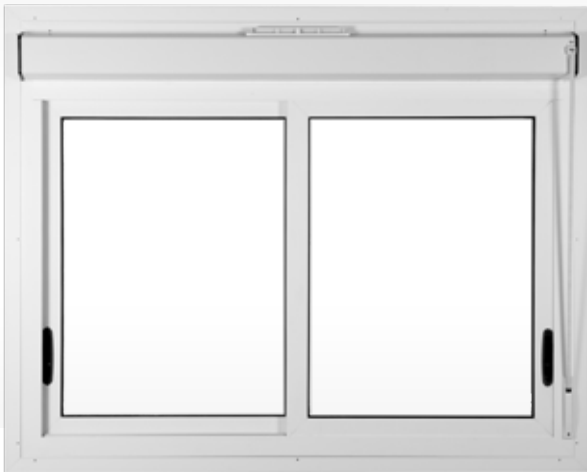

i Double-wing sliding window in cold aluminium with embedded or clamp type handle closure system.


 Installation on any thickness of panel through adaptable counterframe systems.

 Ease of use and ease of manoeuvre.

Certifications

CE CE marking
in accordance with EN 14351-1

Performance*

 **Thermal Insulation**
up to $U_w = 4.4 \text{ W/m}^2\text{K}$ -
in accordance with EN 10077-1

3 **Air permeability**
Class 3
in accordance with EN 12207

5A **Watertight seal**
Class 5A
in accordance with EN 12208

B5 **Wind load resistance**
Class B5
in accordance with EN 12211


Technical specifications ALU Slide D25

Frame construction depth 88 mm
Structural depth of panel 18.5 mm
Polypropylene brushes
Normal or tempered glass

Technical specifications ALU Slide D26


Structural depth of frame 56.2 mm
Structural depth of panel 18.3 mm
4 mm normal or tempered glass, 6 mm laminated glass, 4/6/4 double-glazed normal or tempered glass


Opening systems

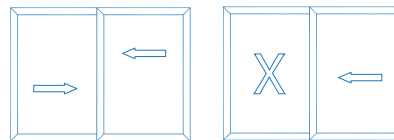


*Values depend on the configuration of the frame.


Options


 Coating in RAL colour


 Black-out curtain

 Fly screen

 Protective grating
Ventilation grating

 Coiler box, gear or motor rolling control

 Integrated panel-window solution

 PVC or aluminium roller shutter