





i White two-wing PVC sliding window with embedded or clamp type handle closure system.


 Installation on any thickness of panel through adaptable counterframe systems.

 Ease of use and ease of manoeuvre.

Certifications

CE CE marking
in accordance with EN 14351-1

Performance

 **Thermal Insulation**
up to $U_w = 1.6$
in accordance with EN 10077-1

C2 **Air permeability**
Class 2 - in accordance with EN 12207


5A **Watertight seal**
Class 5A - in accordance with EN 12208

A3 **Wind load resistance**
Class A3 - in accordance with UNI EN 12211

Technical specifications


Frame construction depth 104 mm
Structural depth of panel 27.5 mm
Glass thickness up to 23 mm
Polypropylene sealing brushes
Fibreglass-reinforced wing


Opening systems

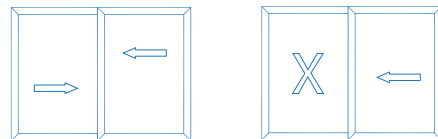


*Values depend on the configuration of the frame.


Options


 Film covering in different colours and wood effect

 Black-out curtain

 Fly screen

 Protective grating
Ventilation grating

 Coiler box, gear or motor rolling control

 Integrated panel-window solution

 PVC and aluminium counter-frame