

Uran Floor

Cement-bonded particle board



i Floor panel with expanded polyurethane foam insulated core density 50 kg/m³.

Application for:
Floors.

Walking surface with cement-bonded particle board 16 mm.

Use and characteristics



Floor



Fast assembly




Thermal insulation

Options



Customisable dimension based on the support surface

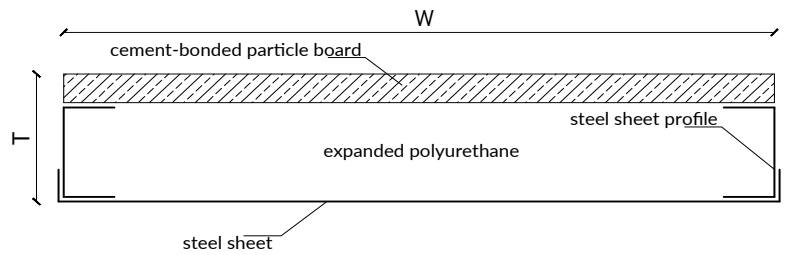

Reference measurements*:

	Width	Length	Thickness
Standard	1200 mm	3000 mm	56 mm
Max. measurements	6000 mm	3000 mm	56 mm

* Size can be customised to prevent cuts and adjustments..

name	panel thickness (mm)	sheet thickness (mm)	thickness Cement-bonded particle board (mm)	internal insulation density	panel weight (Kg/m ²)	transmittance (W/m ² K)
Uran Floor	56	0.6	16	PUR 50 kg/m ³	28.0	0.56