

Uran Floor Chipboard



Floor panel with expanded polyurethane foam insulated core, density 50 kg/m³.
Mineral wool on request.



Application for:
Floor.



Walking surface with
18 mm waterproof chipboard slab

Use and characteristics




Floor



Fast assembly



Thermal insulation

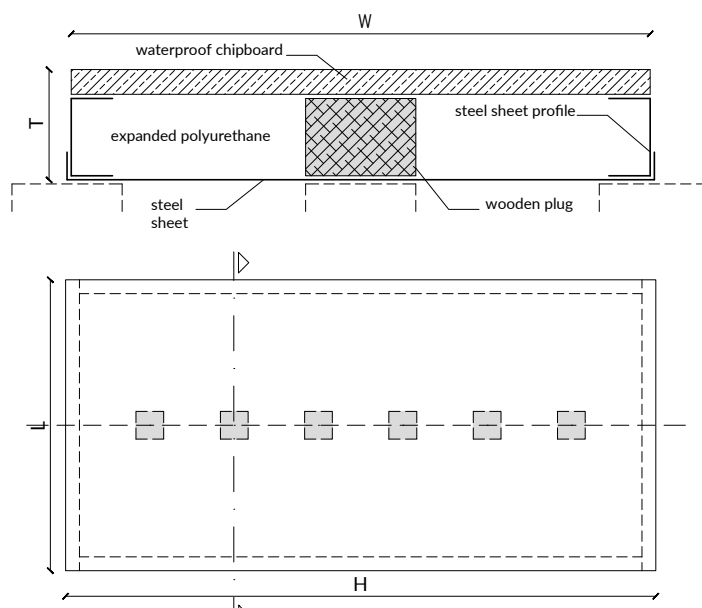

This version allows the possibility of adding wooden reinforcement supports, to be customised based on the layout of the supports.

Reference measurements*:

	Width.	Length.	Thickness.
Standard	1200 mm	3000 mm	80 - 120 mm
Max. measurements	6000 mm	3000 mm	80 - 120 mm

* Size can be customised to prevent cuts and adjustments..

name	panel thickness (mm)	sheet thickness (mm)	thickness CTBH (mm)	internal insulation density	panel weight (Kg/m ²)	transmittance (W/m ² K)
Uran Floor 80	80	0.6	18	PUR 50 kg/m ³	21.7	0.37
Uran Floor 120	120	0.6	18	PUR 50 kg/m ³	26.1	0.23